

# FilmLink<sup>®</sup> 2029

FilmLink<sup>®</sup>2029 is a premium, ultra-fine particle size, wet ground marble specifically designed for use in polyolefin blown and cast films. The hydrophobic coatings agent is stable at higher processing temperatures than standard products. FilmLink 2029 is found in applications such as:


- Blown and Cast Films
- Extrusion Coatings

## TYPICAL PROPERTIES

Source	Sylacauga, AL
Brightness (Hunter Y)	94
CACO <sub>3</sub>	95
Moisture (%)	0.20
Plus 500 Mesh (%)	0.005
Median Particle Size (microns)	1.2
Specific Surface Area (sq. m/g)	4.5
Surface Treatment (%)	1.15
Acid Insolubles	0.5
Refractive Index (mean)	1.6
Specific Gravity	2.7
Dry Bulk Density: (lb/ft <sup>3</sup> )	
- Loose (lb/ft <sup>3</sup> )	45
- Packed (lb/ft <sup>3</sup> )	62

## TYPICAL PARTICLE SIZE DISTRIBUTION GRAPH

**FL 2029 - MicroTrac PSD Curve**

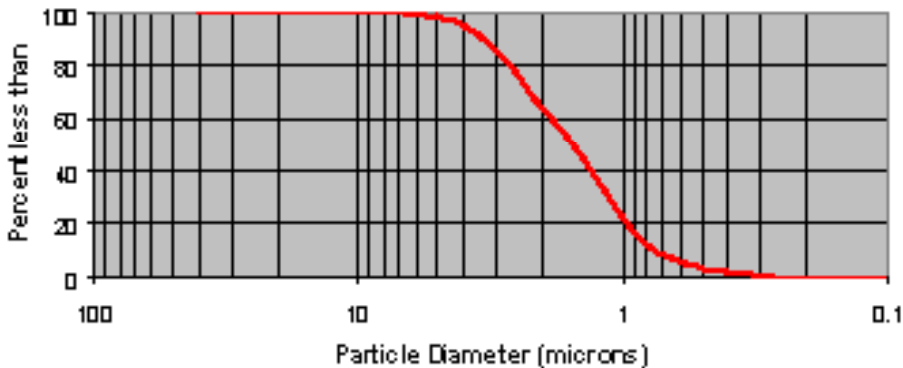

**ISO9001**  
CERTIFIED



DAT001FGCC  
July 2013  
©IMERYS 2013  
Sixth Edition  
All products are registered  
trademarks of IMERYS

CAS No. 1317-65-3

IMERYS  
100 Mansell Court East  
Suite 300  
Roswell, GA 30076

General:  
Tel: (770) 594.0660  
Fax: (770) 645.3384  
[www.imerys-perfmins.com](http://www.imerys-perfmins.com)

Customer Service:  
Tel: (888) 277.9636  
Fax: (770) 645.3631

IMERYS is a business name of  
IMERYS Pigments, Inc.,  
IMERYS Kaolin, Inc. and  
IMERYS Marble, Inc.  
Registered in the USA.

This information is  
believed to be correct.  
However, this information  
does not constitute any  
representation, condition or  
warranty, nor do  
we guarantee results  
to be obtained. All  
recommendations and  
sales are made on the condition  
that we will not be held liable for  
any damages resulting from their  
use. This provision may  
not be changed by any  
of our representatives.

